


Frame Cabinet–Small Swing Frame

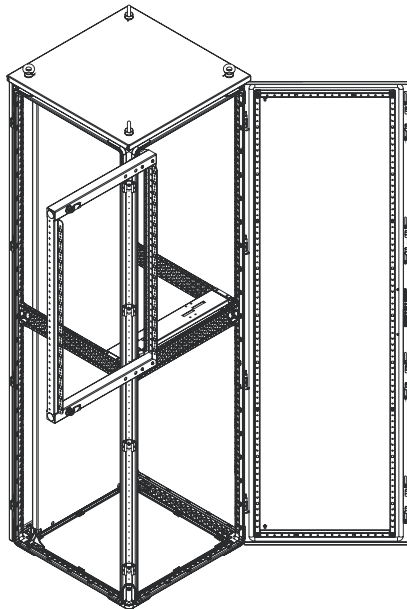

INCLUSIONS (19" SWING FRAME)

- Swing frame
- 2 x slotted turnbuckle locks
- RU indicator tape
- All fixings

Note:

1. Horizontal swing frame rails purchased separately.
2. When used in part height configuration, matrix rail is required to mount horizontal swing frame rails. For matrix rail.
3. Matrix rail required to create sub-structure for mounting.
4. Equipment depth is subject to cabinet depth and mounting pan position.


MATERIALS

- Galvanised Steel Frame – 76 x 38 mm RHS
- Thickness – 2.5 mm


FINISH

- Passivated silver

Max
equipment
depth 135°
Mount

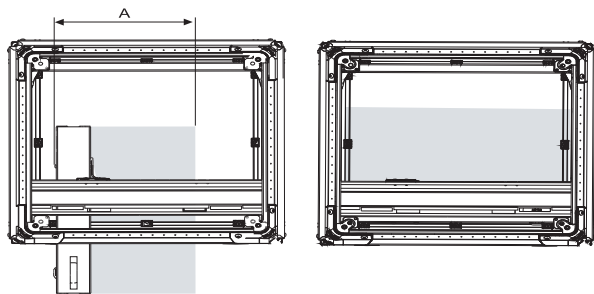

Max
equipment
depth 180°
Mount

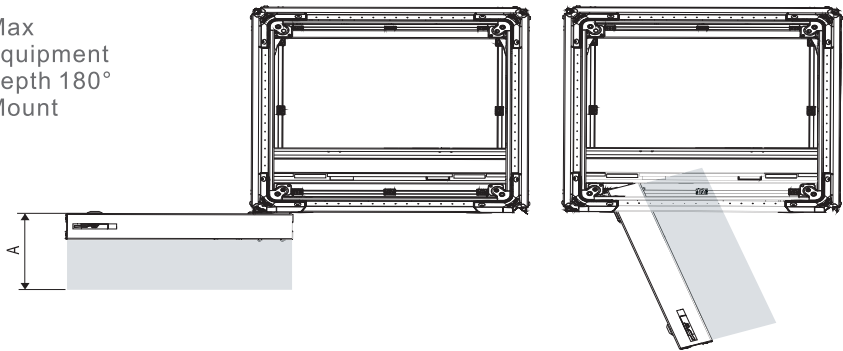

Swing Frame Width		Mounting Position	Maximum equipment depth (a)(mm)
600mm wide	135°	Horizontal Rail	300
	180°	Frame	140
800mm wide	135°	Horizontal Rail	420
		Horizontal Rail	550
	180°	Frame	320
		Frame	460
* Note: 180° on 600mm wide - only available in front side mount position.			