


Switch Board



Switch Board

Type No. for LSB2	Rated Current (AC 23<500V)	Dimensions(mm)			
3Phase/4 Phase		W	H	C	D
DJLSB2-45-3P/DJLSB2-45-4P	30	140	200	100	145
DJLSB2-63-3P/DJLSB2-63-4P	75	140	200	100	145
DJLSB2-160-3P/DJLSB2-160-4P	135	300	400	200	245
DJLSB2-200-3P/DJLSB2-200-4P	200	300	400	250	295
DJLSB2-250-3P/DJLSB2-250-4P	250	400	500	250	295
DJLSB2-315-3P/DJLSB2-315-4P	315	500	600	250	295
DJLSB2-400-3P/DJLSB2-400-4P	400	500	600	250	295

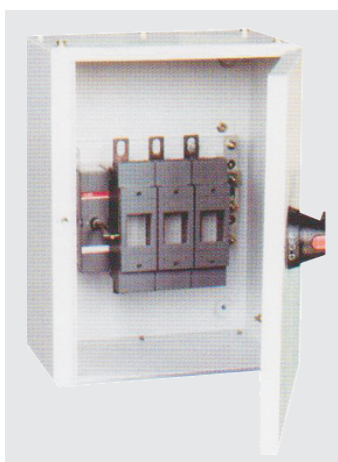

Switch Board with Fuse

Type No. for FSB	Rated Current (AC 23<415V)	Dimensions(mm)			
3Phase/4 Phase		W	H	C	D
DJFSB-32-3P/DJFSB-32-4P	32	300	300	200	245
DJFSB-63-3P/DJFSB-63-4P	63	300	300	200	245
DJFSB-125-3P/DJFSB-125-4P	125	300	300	200	245
DJFSB-200-3P/DJFSB-200-4P	200	400	500	250	295
DJFSB-250-3P/DJFSB-250-4P	250	400	500	250	295




Electrical parameters

Rated voltage:690V-40/60HZ
Rated current:max 630A 3P/4P
Rated current short-term tolerance l_{cw}: max 30KA(1 second)
Rated current peak tolerance l_{pk}: peak value 60KA

HV MCCB standard electrical system

Compatible with IEC60439-1/ EN60439-1/
GB7251-1 standard examination



Type No.	Dimensions(mm)			Ways
	W	H	D	
HMKA2-250/(T)	700	450	200	10 X 3
HMKA3-250/(T)	700	600	200	15 X 3
HMKA4-250/(T)	700	750	200	20 X 3
HMKA5-250/(T)	700	900	200	25 X 3
HMKA3-400/(T)	700	600	250	15 X 3
HMKA4-400/(T)	800	750	250	20 X 3
HMKA5-400/(T)	800	900	250	25 X 3
HMKA3-630/(T)	800	600	250	15 X 3
HMKA4-630/(T)	800	750	250	20 X 3
HMKA5-630/(T)	800	900	250	25 X 3