
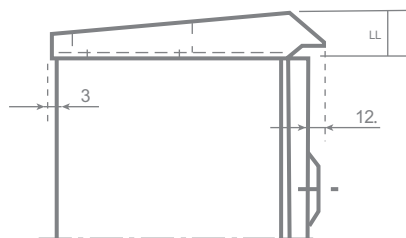


Accessories

Canopy

For outdoor siting, we generally recommend a canopy above the enclosure or the gap between the door or screw fastened rear panel and the enclosure, in order to protect against water and UV radiation.




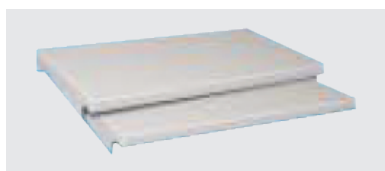


Model	Dimensions (mm)		F
	W	D	
TJ-2015	200	150	36
TJ-2515	250	150	36
TJ-2520	250	200	36
TJ-3015	300	150	36
TJ-3020	300	200	36
TJ-4015	400	150	36
TJ-4020	400	200	36
TJ-4025	400	250	42
TJ-5015	500	150	36
TJ-5020	500	200	36
TJ-5025	500	250	42
TJ-5020	600	200	36
TJ-6025	600	250	42
TJ-6030	600	300	42
TJ-6040	600	400	42
TJ-8020	800	200	36
TJ-8025	800	250	42
TJ-8030	800	300	42
TJ-8040	800	400	42
TJ-10030	1 000	300	42
TJ-10040	1 000	400	42


Wall Mounting Bracket

Material: Manufactured from 1.5mm galvanized steel or 304/316 stainless steel.

Supply includes: Assembly parts for mounting on the enclosure.

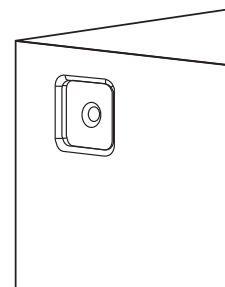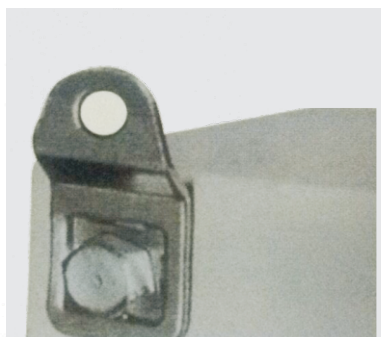


Door Stiffener

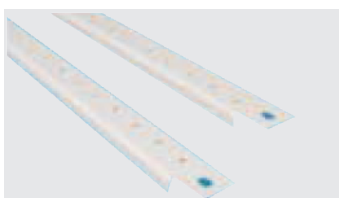

Code		Width(mm)
Mod.	Art	Box
DS	001	300
DS	002	400
DS	003	500
DS	004	600
DS	005	800

To be fixed on the vertical rail of the door to simplify fixing of cable ducts. Manufactured in 1.2mm sheet steel. Zinc plated passivated with 4.2mm diameter holes punched in 25mm pitch pattern

Door stay 1

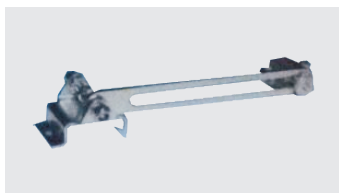

Holds the door at 90° to avoid accidental closing. Manufactured from 1.5mm-2.0mm galvanized steel, it can be used on EC boxes before size EC6820