


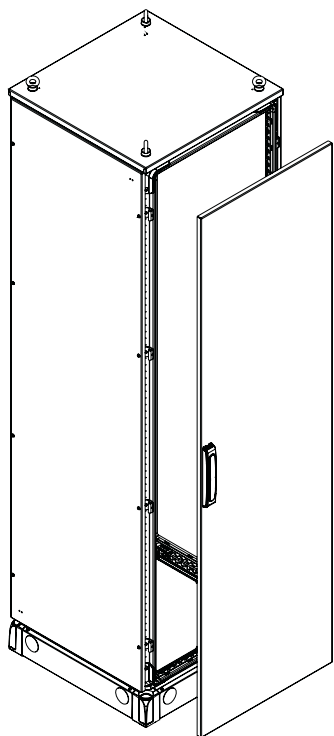

INCLUSIONS

- 19 x 19mm door stiffener rails
- 4 hinge and locking points
- Key lockable swing handle
- Earth strap kit

LOCK OPTIONS

- Pad lockable swing handle
- Lock assembly 7mm square ¼ turn
- Lock insert 8mm triangle
- Lock insert 3mm double bit

ADVANTAGE


- Support loads up to 80kg
- 4 hinge and locking points
- Symmetrical design
- Quick & easy installation
- Patented, ergonomically designed swing handle included
- Design allows 4 doors to be fitted (left or right hand) to all sides of the enclosure

MATERIALS

- Body – zinc coated steel
- Thickness – 1.6mm
- Zinc hinge pins
- Gasket – polyurethane formed in place

FINISH

- Powdercoated Light Grey RAL7035

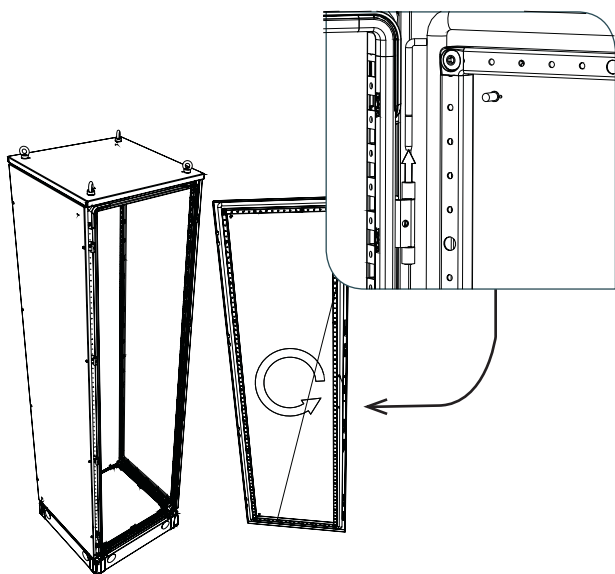

Locking rod design



Key lockable Swing Handle




Polyurethane gasket and hinge pins



Viewing window door

Frame Cabinet-Single Door

Technical Drawings

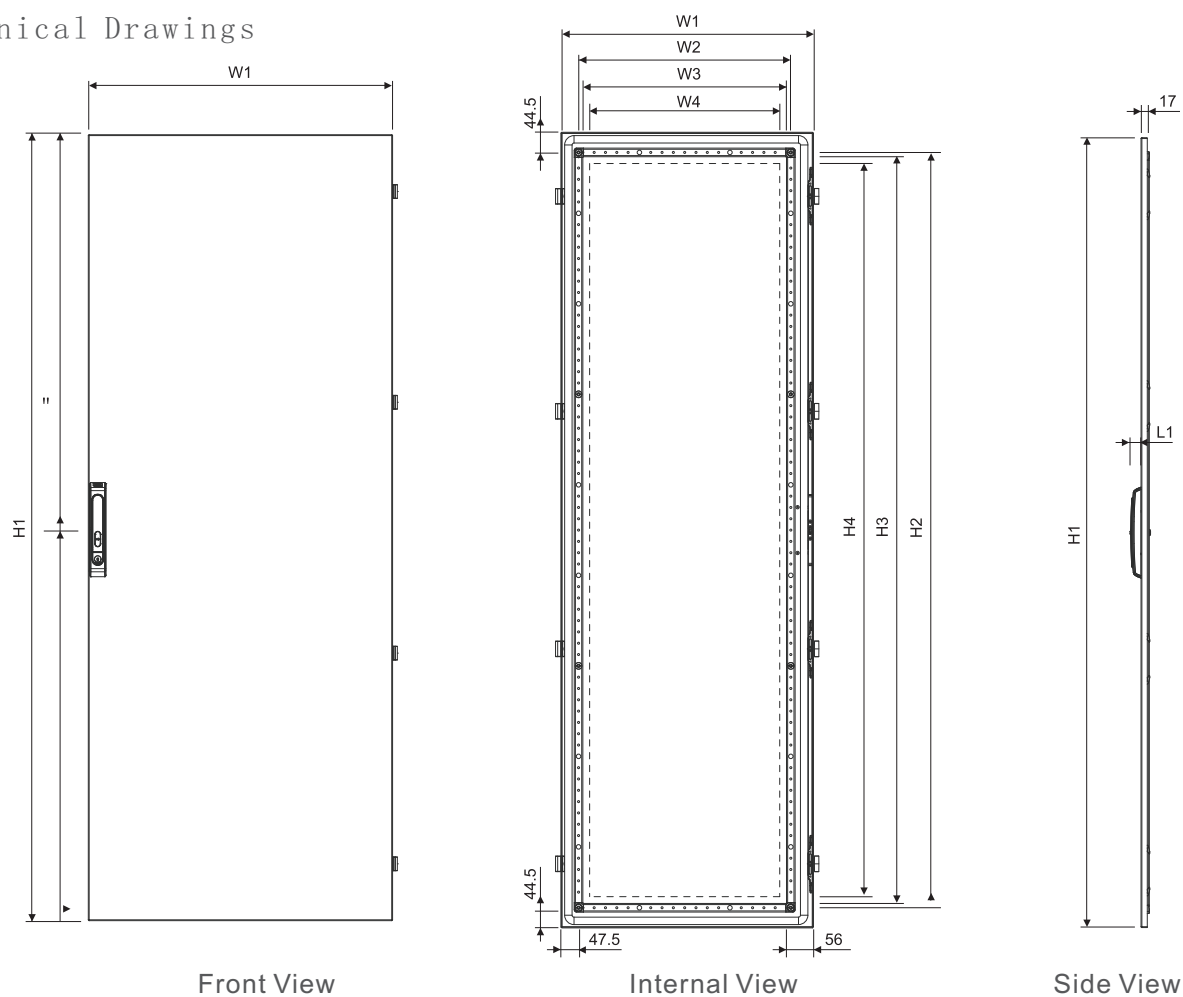

Selection Table

Model			Dimensions (mm)							
			External Single Door		Door Rail Fixing Points		Internal Stiffener Rail		Window Opening	
Solid Door	Window Door	Vented Door	Height (H1)	Width (W1)	Height (H2)	Width (W2)	Height (H3)	Width (W3)	Height (H4)	Width (W4)
DJD1404	—	—	1358	372	1269	269	1250	250	—	—
DJD1405	DJD1405/W	DJD1405/V	1358	472	1269	369	1250	350	1220	320
DJD1406	DJD1406/W	DJD1406/V	1358	572	1269	469	1250	450	1220	420
DJD1408	DJD1408/W	DJD1408/V	1358	772	1269	669	1250	650	1220	620
DJD1604	—	—	1558	372	1469	269	1450	250	—	—
DJD1605	DJD1605/W	DJD1605/V	1558	472	1469	369	1450	350	1420	320
DJD1606	DJD1606/W	DJD1606/V	1558	572	1469	469	1450	450	1420	420
DJD1608	DJD1608/W	DJD1608/V	1558	772	1469	669	1450	650	1420	620
DJD1804	—	—	1758	372	1669	269	1650	250	—	—
DJD1805	DJD1805/W	DJD1805/V	1758	472	1669	369	1650	350	1620	320
DJD1806	DJD1806/W	DJD1806/V	1758	572	1669	469	1650	450	1620	420
DJD1808	DJD1808/W	DJD1808/V	1758	772	1669	669	1650	650	1620	620
DJD2004	—	—	1958	372	1869	269	1850	250	—	—
DJD2005	DJD2005/W	DJD2005/V	1958	472	1869	369	1850	350	1820	320
DJD2006	DJD2006/W	DJD2006/V	1958	572	1869	469	1850	450	1820	420
DJD2008	DJD2008/W	DJD2008/V	1958	772	1869	669	1850	650	1820	620
DJD2204	—	—	2158	372	2069	269	2050	250	—	—
DJD2205	DJD2205/W	DJD2205/V	2158	472	2069	369	2050	350	2020	320
DJD2206	DJD2206/W	DJD2206/V	2158	572	2069	469	2050	450	2020	420
DJD2208	DJD2208/W	DJD2208/V	2158	772	2069	669	2050	650	2020	620