

### Application

- Designed to accept the following disconnect switches and circuit breakers:
- ABB Controls flange mounted variable depth operating mechanisms for disconnect switches and circuit breakers.
- Allen Bradley 1494F flange mounted disconnect switches and 1494D flange mounted operators for circuit breakers. Allen Bradley 1494V variable depth flange mounted disconnect switches and circuit breaker mechanisms.
- C-H Westinghouse Type C361 disconnect switches and operator mechanisms, and type C371 circuit breakers and circuit breaker operating mechanisms. Flex Shaft TM handle operators for circuit breakers.
- General Electric Type STDA flange handles and variable depth operating mechanisms for disconnect switches and circuit breakers. Also Spectra-Flex™ cable operators for circuit breakers.
- Siemens I-T-E Max-Flex™ flange mounted variable depth operating handles for disconnect switches and circuit breakers.



### Construction

- Formed from 10 gauge steel with smooth, continuously welded seams.
- Body stiffeners are included in the larger enclosures for extra rigidity.
- 15" floor stands are welded to the enclosure.
- Flange trough Collar (FTC) around door opening excludes liquids and contaminants.
- Heavy duty lifting eyes are anchored into reinforced top corners.
- Removable doors are secured with heavy duty lift-off hinges.
- Formed 10 gauge steel inner panels are provided on collar studs.
- Panel supports are provided.
- Center post is removable, providing easy panel installation.

# Mild Steel Flour Standing Enclosure


- Heavy duty three point latching mechanism with heavy duty roller ends is provided for ease of door closing.
- Oil resistant gaskets are permanently secured.
- The left door is the master door.
- Master door handle complete with screw defeater and padlock hasp.
- Slave door handle complete with padlock hasp.
- A mechanical interlock activated by the master door prevents the auxiliary door from being opened first.
- The universal flange cutout provides mounting for disconnect operators by use of the appropriate operator adaptor kit.
- A provision for mounting fluorescent lighting is provided.
- A bonding stud is provided in the door and a grounding stud is provided in the enclosure for each door.
- A literature pocket is provided.

## Finish

- Disconnect switches, circuit breakers and operators are not provided with the enclosure, and must be ordered separately from the manufacturer.

## Accessories

- Inner Panels
- Blowers and Fans
- Door Stop Kit
- Flange Disconnect Operator Adaptor Kits
- Heaters
- Temperature Controls
- Top Hat Cable Modules
- Cooling Products
- Ventilation
- Filtered Fans
- Floor Stand Kit
- Lighting
- Window Kits

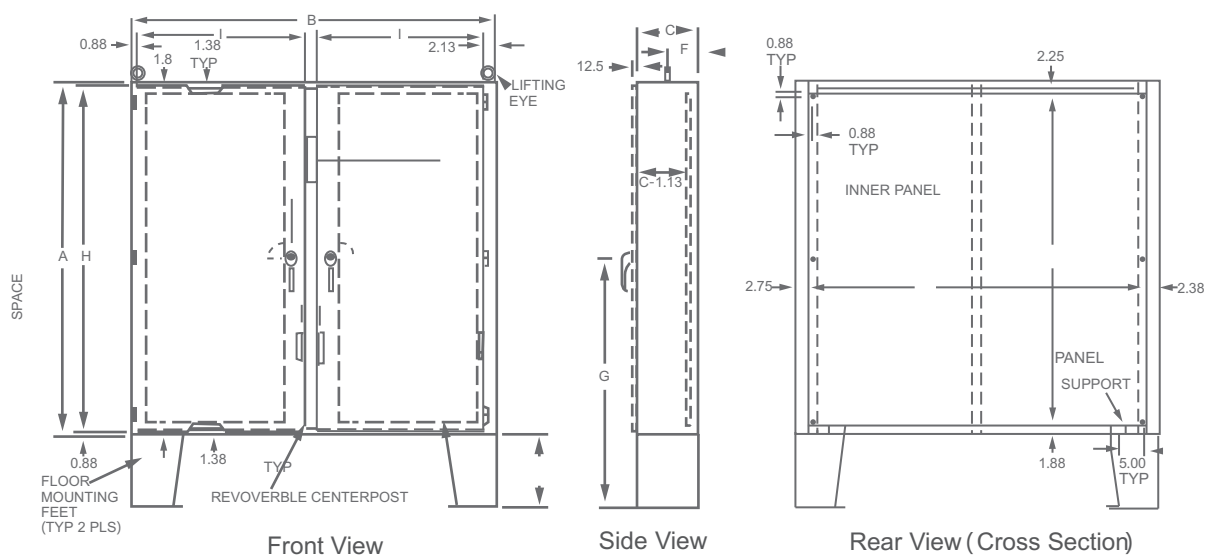

| Part No. I   | Panel Size(inch) |       |       |       |       |      |       |       |       |       |
|--------------|------------------|-------|-------|-------|-------|------|-------|-------|-------|-------|
|              | A                | B     | C     | D     | E     | F    | G     | H     | I     | K     |
| DJ-FSP604912 | 60.13            | 48.88 | 12.13 | 56.00 | 44.00 | 6.06 | 45.06 | 59.13 | 22.50 | 20.81 |
| DJ-FSP606112 | 60.13            | 60.88 | 12.13 | 56.00 | 56.00 | 6.06 | 45.06 | 59.13 | 28.50 | 26.81 |
| DJ-FSP726112 | 72.13            | 60.88 | 12.13 | 68.00 | 56.00 | 6.06 | 51.06 | 71.13 | 28.50 | 26.81 |
| DJ-FSP727312 | 72.13            | 72.88 | 12.13 | 68.00 | 68.00 | 6.06 | 51.06 | 71.13 | 34.50 | 32.81 |
| DJ-FSP727318 | 72.13            | 72.88 | 18.13 | 68.00 | 68.00 | 9.06 | 51.06 | 71.13 | 34.50 | 32.81 |