

Accessories of Floor Standing Cabinet



Multiple Door

Width	Mode	Height(mm)	Mode	Height(mm)
600mm	MD602	200	MDG602	195
	MD603	300	MDG603	295
	MD604	400	MDG604	395
	MD605	500	MDG605	495
	MD606	600	MDG606	595
	MD608	800	MDG608	795
	MD609	900	MDG609	895
	MD6010	1000	MDG6010	995
800mm	MD802	200	MDG802	195
	MD803	300	MDG803	295
	MD804	400	MDG804	395
	MD805	500	MDG805	495
	MD806	600	MDG806	595
	MD808	800	MDG808	795
	MD809	900	MDG809	895
	MD8010	1000	MDG8010	995

In 2mm mild steel complete with gasket and locking system & hinges MD:without plexiglass door
MDG:with plexiglass door

Clamp Board

Model	Width(mm)	Pack
CMB600	600	5PCS/SET
CMB800	800	5PCS/SET

For multiple door is made up of 1.5mm, mild steel with fixing accessories


Cover

Model	WXH(mm)	Pack
CV006	600x100	4
CV008	800x100	4

In 1.5mm sheet steel for sealing the top & bottom of cabinet, Supply include: 4pcs seal covers & its fixing accessories
Pack: 4pcs/set



Multiple Door



Clamp Board




Seal Cover



Cabinet with Blank Front Plate



H rail



H rail for blank front plate

This rail is easy to fix on the cabinet height from 1400mm-2200mm, for fixing Din-rail C45, blank front panel (surface plate/flush plate)

H rail

Model	For cabinet height(mm)
H1400	1400mm
H1600	1600mm
H1800	1800mm
H2000	2000mm
H2200	2200mm



Component Plate

Two type:
max carrying ability 50KG
max carrying ability 100KG
Material: manufactured in 1.5mm sheet steel with holes (except CPH604N & CPH605N & CPH606N)

Component Plate

Max weight	W × D (mm)	50KG	50KG	100KG
Cabinet width		Model	Model	Model
600	300×471	CPH604	CPH604N	CPH604F
	400×471	CPH605	CPH605N	CPH605F
	500×471	CPH606	CPH606N	CPH606F
	300×671	CPH804	CPH804N	CPH804F
800	400×671	CPH805	CPH805N	CPH805F
	500×671	CPH806	CPH806N	CPH806F

HH Rail for Component Plate



Model	Height(mm)
HH1400	1400mm
HH1600	1600mm
HH1800	1800mm
HH2000	2000mm
HH2200	2200mm

Accessories of Floor Standing Cabinet

FS Rail, FSG Rail with Mounting Flange

Pack: 4pcs/set with 5 rows of universal skeletal structures of partial assembly.

Manufactured in 1.5mm zinc passivated sheet steel with 8pcs fixing screws M513mm



FS Rail, FSG Rail with Mounting Flange

Model	For depth of cabinet (mm)			
	FS400	FS500	FS600	FS800
Dimension	400	500	600	800
Pcs/set	4	4	4	4
Model	For depth of cabinet (mm)			
	FSG600	FSG800	FSG1000	FSG1200
Dimension	600	800	1000	1200
Pcs/set	4	4	4	4

Door Rail



Model	for cabinet width(mm)	Single or Double door
DR470	600	single
DR670	800	single
DR870	1000	single
DR270	800	double
DR370	1000	double

manufactured from 1.5mm sheet steel
pack: 1pcs door rail with fixing accessories

Door Stop

Model: DS001

Always keep the door opened
package: 1 piece



Door Stop

Model: DS002

For heavy equipment installation,
close the door when the door
lifting the ancillary equipment
Package: 1 piece



Insert Nut

Model: INU6/INU8

Special designed nut use to install
on FS box manufactured from zinc
Alloy.
Package: 50pcs/set



Keyboard Tray



This is for special designed Keyboard Tray.

Keyboard Tray



It is easy to turn down in
maintaining and return between
door frame after maintained.
Carrying capacity: 30KG largest

Model	W	D	Cabinet width (mm)
C44	413	400	600
C64	613	400	800

Accessories of FloorStanding Cabinet



Steel Pocket

Thickness:1.5mm mild steel

For cabinet Width(mm)	Model	Size (mm)		
		W	H	D
400	PP400	255	260	90
500	PP500	355	260	90
600	PP600	455	260	90
800	PP800	655	260	90
900	PP900	755	260	90
1000	PP1000	855	260	90

A4 plastic Pocket

Model:PP100 Material:ABS



Side Cover

Material:1.5mm mild steel

Color:RAL7032 or RAL7035

Supply :2pcs side covers & its fixing accessories

Function:connect into a complete cabinet

Model	Height (mm)	Depth (mm)
ESSP 124	1200	400
ESSP 126	1200	600
ESSP 128	1200	800
ESSP 144	1400	400
ESSP 146	1400	600
ESSP 148	1400	800
ESSP 166	1600	600
ESSP 168	1600	800
ESSP 184	1800	400

Model	Height (mm)	Depth (mm)
ESSP 185	1800	500
ESSP 186	1800	600
ESSP 188	1800	800
ESSP 204	2000	400
ESSP 205	2000	500
ESSP 206	2000	600
ESSP 208	2000	800
ESSP 226	2200	600
ESSP 228	2200	800

More size to be request to the clients...

Polyurethane Foam



Lifting Eyebolt

model: WA065 pack:4pcs/set



Self Tapping Screw



Used for cabinet profiles, punching rail and punching material 4.5 mm round hole
Size:M5 X 10.
Pack:100pcs/set

130 ° Hinge
model:DJ-H130
pack:6pcs/set



Fan and Filter

ABS synthetic resin,fire resistant and UV-resistant, dustproof coefficient:80%.

Model	The outer part	Voltage	Current	Air flow
Fan1238HA2B	120×120×38mm	220 ~240VAC	0.13/0.11A	120/140CFM
Fan1725HA2B	φ 172×55mm	220 ~240VAC	0.13/0.12A	218/245CFM
Fan2206HA2B-2P	φ 220×60mm	220 ~240VAC	0.25/0.18A	430/490CFM
Fan2509HA2B-2P	φ 254×89mm	220 ~240VAC	0.28/0.22A	666/730CFM

Filter



Model	The outer part	Efficient blast volume	level of protection	Applicable blower fan
FIL-9803A	148.5×148.5×13.5mm	25.0m3/min	IP44	KA1238HA2B
FIL-9804A	204×204×13.5mm	50.0m3/min	IP44	KA1725HA2B
FIL-9805A	255×255×13.5mm	80.0m3/min	IP44	KA2206HA2B-2P
FIL-9806A	320×320×13.5mm	120m3/min	IP44	KA2509HA2B-2P

Accessories of FloorStanding Cabinet

Divider Plate

Divider plate is made from 1.5mm mild steel with fixing accessories



MODEL	cabinet width	W x H (mm)
DP 64	600	492×333
DP82	800	692×133
DP86	800	692×533
DP 104	1000	892×333
DP 106	1000	892×533
DP 122	1200	1092×133
DP 124	1200	1092×333
DP 126	1200	1092×533

WI 300 LiftingEyebolt

Model:WI300
4pcs/set with fixing accessories




Baying Bracket

Model: WB1

For connection and hanger two parts.

Material:galvanized plate



Baying Bracket

Model: WB2

For connection and hanger two Parts

Material:galvanized plate

Package:1pcs/set



Steel Bolt Anchor

Model: WB3

Hexagon steel proximate matter, supply include:its fixing accessories zinc-plating package:6pcs/set



Cable Clip

Used for cable fixed in C installation Angle rail.
Package:2pcs/set



Model	Cable Diameter (mm)
U6-12	6-12
U12-16	12-18
U18-22	18-22
U22-26	22-30
U30-34	30-38
U38-42	38-42
U42-46	42-50
U46-50	50-64


Cable Tray

Material: galvanized steel , zinc and Chromate Passivation



Model	Cabinet Width(mm)	Length (mm)
CG4	400	385
CG6	600	585
CG8	800	785
CG9	850	835
CG10	1000	985
CG12	1200	1185
CG16	1600	1585
CG18	1800	1785

Cable Gripper

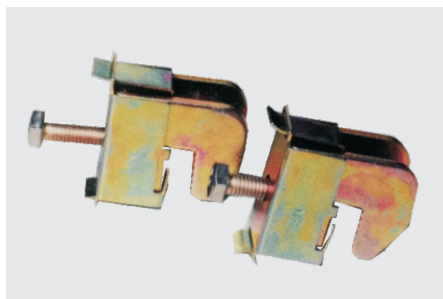

Model	Thickness of bus	Round lead wiring	Piled copper bus terminal space	Tightening turning moment	Package
SG201	4-5mm	1-4mm ²		2Nm	50
SG202	4-5mm	2.5-16mm ²	8×	3Nm	50
SG203	4-5mm	16-50mm ²	10.511mm	6-8Nm	50
SG204	4-5mm	35-70mm ²	16.515mm	10-12Nm	50
SG205	4-5mm	70-185mm ²	22.520mm	12-15Nm	50
SG206	9-10mm	1-4mm ²		2Nm	50
SG207	9-10mm	2.5-16mm ²	88mm	3Nm	50
SG208	9-10mm	16-50mm ²	10.511mm	6-8Nm	50
SG209	9-10mm	35-70mm ²	16.515mm	10-12Nm	50
SG300	9-10mm	70-185mm ²	22.520mm	12-15Nm	50