


Frame Cabinet-Small Swing Frame

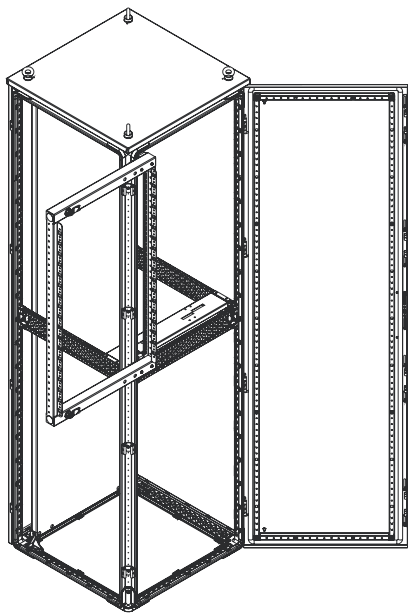

INCLUSIONS (19" SWING FRAME)

- Swing frame
- 2 x slotted turnbuckle locks
- RU indicator tape
- All fixings

Note:
1. Horizontal swing frame rails purchased separately.
2. When used in part height configuration, matrix rail is required to mount horizontal swing frame rails. For matrix rail.
3. Matrix rail required to create sub-structure for mounting.
4. Equipment depth is subject to cabinet depth and mounting pan position.


MATERIALS

- Galvanised Steel Frame – 76 x 38 mm RHS
- Thickness – 2.5 mm


FINISH

- Passivated silver

Max equipment depth 135° Mount

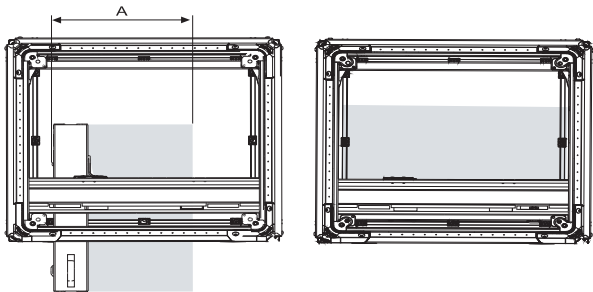

Max equipment depth 180° Mount


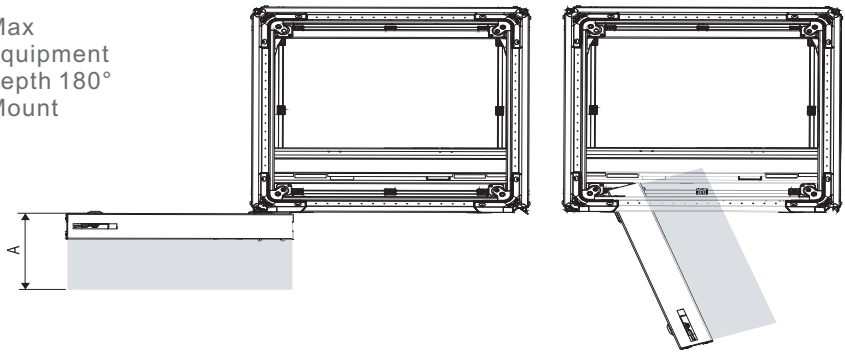


Swing Frame Width		Mounting Position	Maximum equipment depth (a)(mm)
600mm wide	135°	Horizontal Rail	300
	180°	Frame	140
800mm wide	135°	Horizontal Rail	420
		Horizontal Rail	550
	180°	Frame	320
		Frame	460



* Note: 180° on 600mm wide - only available in front side mount position.

Frame Cabinet-Small Swing Frame

19" Swing Frame

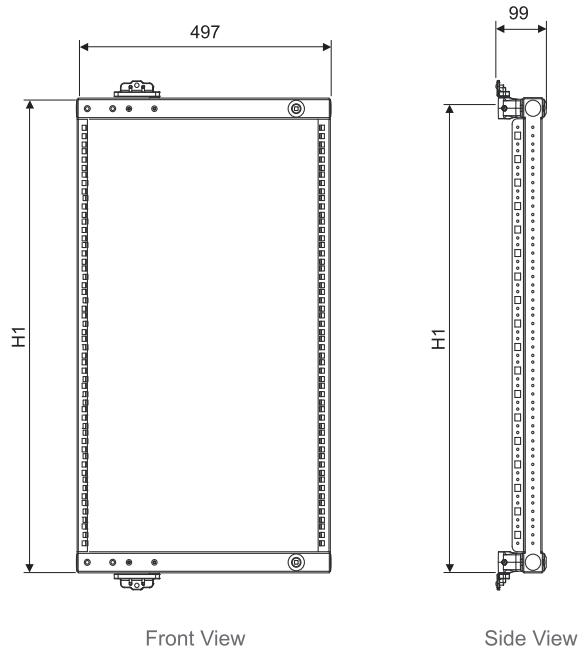

Top View - Pivot 180° Position

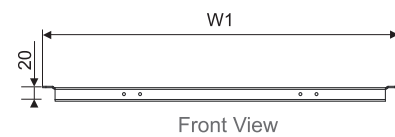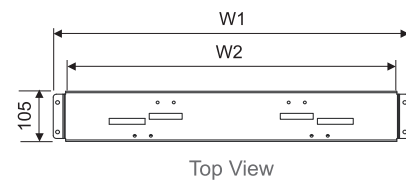

19" Swing Frame

Model	Dimensions (mm)		To suit frame	
	Height (H1)	Height (mm)	RU	
DJSF03RU/SML	224.5	Fits all	3	
DJSF06RU/SML	349.5	Fits all	6	
DJSF09RU/SML	499.5	Fits all	9	
DJSF12RU/SML	624.5	Fits all	12	
DJSF15RU/SML	749.5	Fits all	15	
DJSF18RU/SML	899.5	Fits all	18	


Model	Dimensions (mm)		To Fit Frame Width (mm)
	Width (W1)	Fixing Width (W2)	
DJRF06/SML	551	538	600
DJRF08/SML	751	738	800



Tool removable lock



Alignment bracket



180° and 135° swing



Front and rear mount swing frames