





Outside dimension

ELE8 ELE12

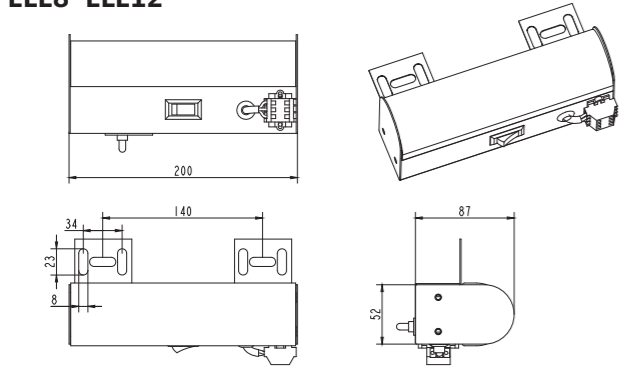

ELE8D ELE12D

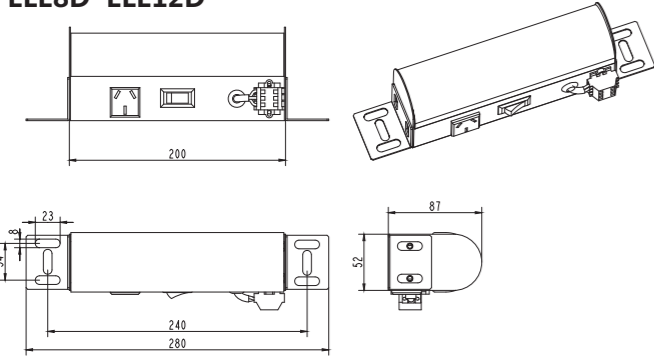

ELE8 ELE12



ELE8D ELE12D

Features

- Optional integrated door switch allows the light to illuminate when the door is open;
- Simple screw-free plug-in installation;
- Specially designed arc-shaped grating ensures a softer glare-free light;
- Thoughtful design allows for the shielding of a limit switch;



Model No.	ELE8	ELE8D	ELE12	ELE12D
Factory ID No.	30700193	30700199	30700194	30700200
Dimensions (W×H×D)	200x87x52 mm			

Illuminating Data	ELE8	ELE8D	ELE12	ELE12D
Lighting power	8W		12 W	
Light source	Energy saving tube/ 2U			
Illuminance (d ≤ 3000mm)	700 Lm			
Light tube starting (+ 20℃)	hot start-up =>0.4 sec			

Electrical Data	ELE8	ELE8D	ELE12	ELE12D
Rated voltage	AC 230			
Rated current	0.35 A			
Service life	≥ 10,000 h			
Backup socket(for AC)	16 A			

Mechanical Data	ELE8	ELE8D	ELE12	ELE12D
Fitting position	Horizontally or vertically fixed onto enclosure frame			
Mounting	Bolts			
Housing material	Sheet steel/statically powder coating, the stainless steel cover is available on request			
Weight	0.55 kg	0.51 kg	0.55kg	0.55kg
Color	RAL 7035 light grey, other colors available on request			
Connecting method	Standard cable			
Connection	Standard cable 3*1.5 mm², max. torque 0.8 Nm			

Supplementary Data	ELE8	ELE8D	ELE12	ELE12D
Operating/Storage temperature	-15°C (+ 5°F) ~ + 50°C (+ 122°F) / -25°C (- 13°F) ~ + 70°C (+ 158°F)			
Operating/Storage RH	≤ 90% RH			
Protection rating	IP 20			
Electromagnetic Interference	EN 55 015			
Electromagnetic Immunity	EN 61000-3-2			
Test standard	EN 60598-1			
Accessories	EL100			
Approval	CE			