


Outside dimension



Features

- The thermostat(N.O.),contact maker for regulating the heater , switching signal will be closed when the RH limit has been exceeded;
- The thermostat(N.C.) ,contact breaker for regulating the filter fan , the switching will be open when the RH has be raised to the setting value;
- Small size, wide setting range;
- Simple to mount, high switching performance;

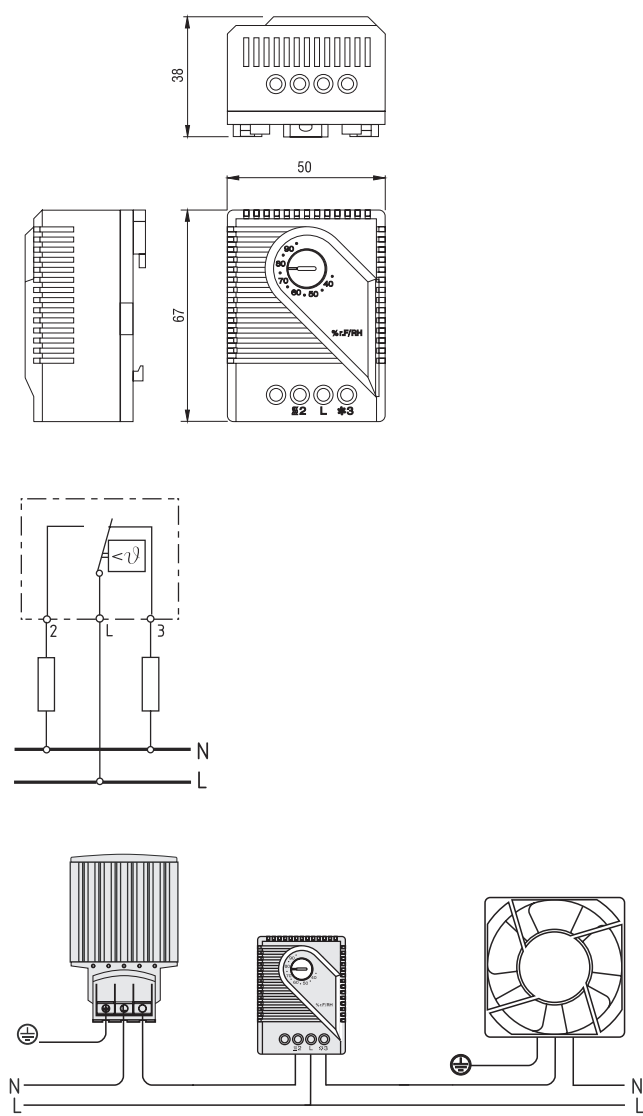

Model No.	MY11
Factory ID No.	30600016
Dimensions (W × H × D)	50x67x38 mm

Thermal data	MY11
Temperature control range	35% ~ 95%
Switch temperature difference	4% RH
Max. switching capacity	AC250V, 5 (2) A / AC120V, 15 (2) A / DC 30W
Sensor element	Polyamide Film

Electrical data	MY11
Contact resistance	<10mOhm
Contact type	Nornally Open(NO/NC) contact
Service life	>50 000 cycles

Mechanical data	MY11
Fitting position	variable, preferably vertical
Mounting	35mm DIN rails, En50022
Casting	plastic according to UL94 V0, light grey
Self-extinguishing grade	UI94 V – 0
Weight	55 g
Color	RAL 7035 light grey; other colors are available on request;
Connecting method	4 pole–terminal
Connection	Standard cable 2*1.5 mm², max. torque 0.8 Nm

Supplementary Data	MY11
Operating/Storage temperature	0°C (+ 32°F) ~ + 60°C (+ 140°F) / –20°C (– 4°F) ~ + 60°C (+ 140°F)
Operating/Storage RH	≤ 90% RH
Protection rating	IP 20
Accessories	SAH
Approval	CE