

# Accessories of Wall Mount Enclosure

## Column Fixing Member



Used to secure a round column or square post, Fix comfortably.

Applicable column diameter / size:  
Diameter 40 to 190mm  
Diameter 50 to 150mm

Material Science:  
Install profile rail, clamp profiles:  
steel plate, galvanized  
Tension belt:  
304 Stainless steel



2, install profiles rail, 600mm long,  
4 clamping profiles,  
2 tension belts,  
4 clamping angles,  
4 screws and M8 nuts  
For mounting on a cabinet

| Each package | Model |
|--------------|-------|
| 1 Set        | SA    |



4 clamping profiles,  
2 tension belts,  
4 clamping angles

| Each package | Model |
|--------------|-------|
| 1 Set        | CA    |


## Louver Plates



To be fitted on any surface of the enclosure for internal ventilation.  
Colour RAL-7032 textured




| REF. | A   | B   | C   | D   | E   | F   | mm |
|------|-----|-----|-----|-----|-----|-----|----|
| LP-1 | 158 | 78  | 65  | 100 | -   | -   |    |
| LP-2 | 208 | 89  | 72  | 80  | 190 | -   |    |
| LP-3 | 244 | 90  | 72  | 80  | 226 | -   |    |
| LP-4 | 359 | 129 | 114 | 300 | 344 | 100 |    |
| LP-5 | 445 | 148 | 130 | 300 | 427 | 100 |    |
| LP-6 | 259 | 79  | 65  | 200 | -   | 100 |    |
| LP-7 | 158 | 90  | 72  | 80  | 140 | -   |    |
| LP-8 | 345 | 148 | 130 | 200 | 327 | 100 |    |
| LP-9 | 558 | 129 | 116 | 500 | 454 | 100 |    |


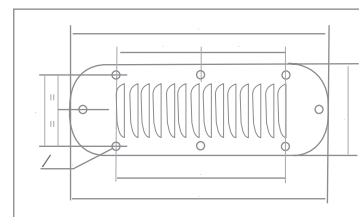


## Plinth

Plinth to be 8#/10# channel steel galvanized or hot dipped galvanized



| Model    | Dimensions(mm) |     | Model    | Dimensions(mm) |     |
|----------|----------------|-----|----------|----------------|-----|
|          | W              | D   |          | W              | D   |
| DJ-PL42  | 400            | 200 | DJ-PL43  | 400            | 300 |
| DJ-PL52  | 500            | 200 | DJ-PL53  | 500            | 300 |
| DJ-PL62  | 600            | 200 | DJ-PL63  | 600            | 300 |
| DJ-PL82  | 800            | 200 | DJ-PL83  | 800            | 300 |
| DJ-PL102 | 1000           | 200 | DJ-PL103 | 1000           | 300 |
| DJ-PL122 | 1200           | 200 | DJ-PL123 | 1200           | 300 |



## Earth Cable for Enclosure

| Model     | S(mm <sup>2</sup> ) | Length (mm) | Diameter of rings(mm) |
|-----------|---------------------|-------------|-----------------------|
| TJ-CB6130 | 6                   | 130         | 6.4                   |
| TJ-CB6160 | 6                   | 160         | 6.4                   |
| TJ-CB6168 | 6                   | 160         | 8.3                   |
| TJ-CB1025 | 10                  | 250         | 6.4                   |
| TJ-CB2535 | 25                  | 350         | 8.3                   |

## Pole Filler



Model:MC09/MC18

Pole filler to be used in Dinrail box to cover the holes, to avoid dust and water inside the Din tail box

MC09: 9 mm long1/2P

MC18: 18 mm long1P