

Distribution Boards



100A-Germany type

Combine Board

EF Changeover Switch

Amps	Al. Cond	Cu Cond
16	4mm ²	2.5mm ²
32	16mm ²	10mm ²
63	25mm ²	16mm ²
100	50mm ²	35mm ²
125	75mm ²	95mm ²
200	150mm ²	185mm ²

Bell Type Changeover Switch

30A/60A/100A/200A/400A/630A




60A

200A

Type No. for LSB1	Rated Current (AC 23<500V)	Dimensions(mm)		
3Phase/4 Phase		W	H	D
DJLSB1-45-3P/DJLSB1-45-4P	30	140	200	145
DJLSB1-63-3P/DJLSB1-63-4P	75	140	200	145
DJLSB1-160-3P/DJLSB1-160-4P	135	300	400	245
DJLSB1-200-3P/DJLSB1-200-4P	200	300	400	295
DJLSB1-250-3P/DJLSB1-250-4P	250	400	500	295
DJLSB1-315-3P/DJLSB1-315-4P	315	500	600	295
DJLSB1-400-3P/DJLSB1-400-4P	400	500	600	295

Chamber Busbar

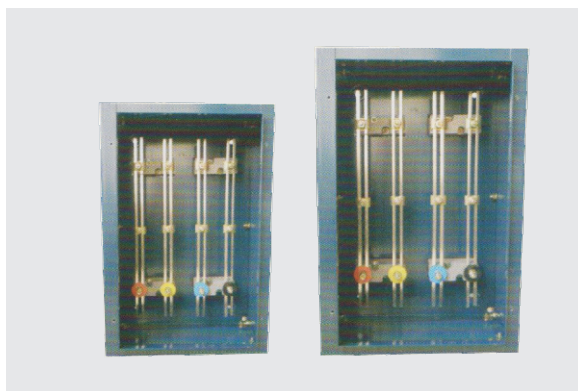


2FT
100A/200A/400A/630A/800A

4FT

Nominal unit rating	List No. according to nominal length			
	550mm	900mm	1350mm	1800mm
100A	142 BBC	143 BBC	144 BBC	146 BBC
200A	242 BBC	243 BBC	244 BBC	246 BBC
400A	442 BBC	443 BBC	444 BBC	446 BBC
630A		643 BBC	644 BBC	646 BBC
800A		843 BBC	844 BBC	846 BBC

NEN Gear Switch

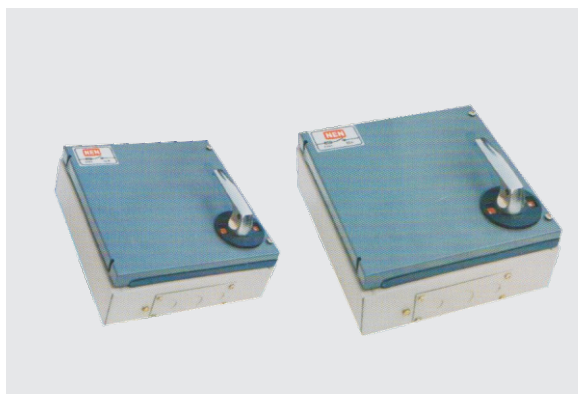

32A

63A

UNIT	Short time withstand current (r.m.s. Amps for 1 second)	Short circuit making capacity (Peak Amps at 415V AC)	Rated fused short- circuit (prospective r.m.s. amps at 415V AC)
20A	640A	2.96KA	80KA
32A	960A	5.12KA	80KA
63A	2000A	6.62KA	80KA
100/125A	3750A	8.42KA	80KA
200A	5000A	10KA	80KA
400A	8000A	15KA	80KA